



MIT
Made in Taiwan

研
磨
機
Spring
End
Grinding
Machine



HS-300-2-CBN

<1.1°


立式磨床
Down Feed

+ Features

測長功能 Length Detector	NO
上 / 下 砂輪升降顯示器 Grinding Wheel UP / Down Display	選購品 Optional
自動進料設備 Auto Feed-in Equipment	選購品 Optional
集塵機 Dust Collector	選購品 Optional
砂輪規格(公厘) Grinding Wheel Dimension(mm)	OD. Ø305 mm ID. Ø100 mm
砂輪數目 Grinding Wheel NO.	2

•另有設計砂輪為Ø 250(O.D.)mm (No I.D.)
Fitting another Grinding wheel

- 彈簧全自轉(視彈簧長度設計)
Spring automatic rotating system (Designed by length of spring)
- 砂輪粒度平整校正器
Grinding wheel dressing system
- 一次研磨即可完成
Grinding accomplished in one beltline step
- CBN砂輪可供精加工微調至0.01 ~ 0.005 mm
The CBN grinding wheel fine grinding jogging to 0.01 ~ 0.005 mm

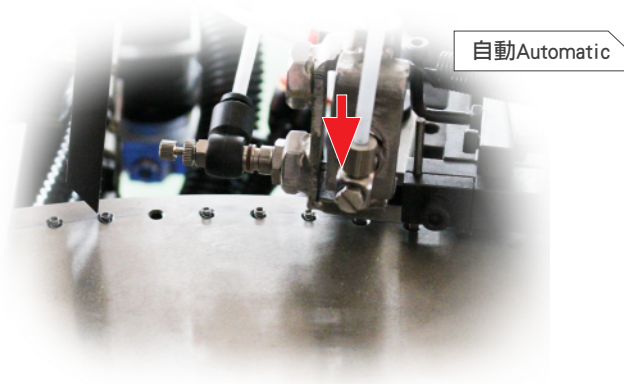


自動Automatic



標準Standard

HS-300-2-CBN

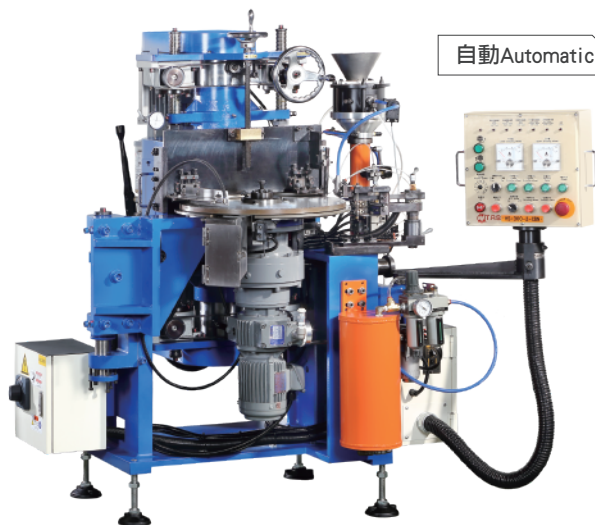

自動Automatic

線徑範圍(公釐) Wire Capacity(mm)	Ø 0.3 ~ Ø 2.0 mm	機臺本體尺寸(公釐) Machine Body Dimension(mm) 不含螢幕與電控箱 Electronic Control Box And Screen Excluded	長 Length	1400 mm
彈簧最大外徑(公釐) Max. Spring O.D.(mm)	Ø 35 mm		深 Depth	1100 mm
彈簧長度範圍(公釐) Spring Length(mm)	5 ~ 70 mm		高 Height	1450 mm
生產速度(條/分) Production Speed(pcs/min)	15 ~ 40 pcs/min	機臺安全操作 佔地面積(公釐) Safety Operation Location Area(mm)	長 Length	5500 mm
轉盤轉速(每分鐘轉速) Plate Rate(rpm)	0.25 ~ 1.50 rpm		深 Depth	5000 mm
砂輪轉速(每分鐘轉速) Grinding Wheel Rate(rpm)	1800	機臺重量(公斤) Machine Weight(kgs)		920 kgs